

REACT

QUALITY FIRST

WEIGH BRIDGES - 8M TO 20M



SPEC SHEET

SPECIAL FEATURES

- 50 Ton
- Easy Modular construction in-ground or above-ground
- Large LED display screen
- Keli Load Cells
- Readings and printouts from Monitor
- 150% safe overload
- Solar option
- Technical drawings for concrete available

BENEFITS

- Choice of 8m or 20m Bridge
- Check truck axle weights before leaving farm
- Weigh livestock and hay
- Monitor fertilizer and grain usage
- Improve feedlot accuracy
- Weigh scrap steel

RIV240723

JACOB
0427 180 673
JACOB@TOUGHINDUSTRIAL.COM.AU

AARON
0456 676 700
AARON@TOUGHINDUSTRIAL.COM.AU

KAHIL
0400 459 097
KAHIL@TOUGHINDUSTRIAL.COM.AU

13 NEWCASTLE CRESCENT, CAVAN, SA. 5094



WEIGH BRIDGES - 8M TO 20M

SPEC SHEET

TECHNICAL SPECIFICATIONS

8m Weigh Bridge - 50 Ton

Overall Dimension	Length 8 m
	Width 3 m
Deck Height	390 mm
Deck Thickness	10mm Checker Plate
Total Component Weight	3,600 kg

Bridge


Rated Weight	50 Ton
Type	Keli Load Cells
Powered	240V or Solar/Battery Powered

20m Weigh Bridge - 50 Ton

Overall Dimension	Length 20 m
	Width 3 m
Deck Height	390 mm
Deck Thickness	10mm Checker Plate
Total Component Weight	9,000 kg

Bridge

Rated Weight	50 Ton
Type	Keli Load Cells
Powered	240V or Solar/Battery Powered

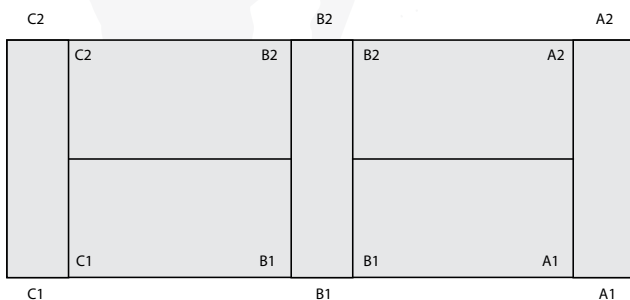

\$

Prices exclude GST